


# RJ45 CAT5E SLIM KEYSTONE JACK (110 PUNCH DOWN)

<b>SKUS</b>	SJ-71BK	(Black)	SJ-71OR	(Orange)
	SJ-71BL	(Blue)	SJ-71RD	(Red)
	SJ-71GN	(Green)	SJ-71WT	(White)
	SJ-71GY	(Grey)	SJ-71YL	(Yellow)

## FEATURES

- Category 5E UTP RJ45 Slim Keystone 16.6 x 31.5 x 22.3 mm
- Use with 110 punch-down tools for speedy termination of Cat5e bulk cable
- Snap in for use with wall plates, surface-mount boxes, or unloaded patch panels
- 90° wire connection
- Backwards compatible with previous keystone jack standards
- Colour coded T568A and T568B wiring patterns on side of jack
- UL approved, 3P Third Party Tested, RoHS compliant, meets C5E EIA/TIA 568A/B Standard, cETLus certified

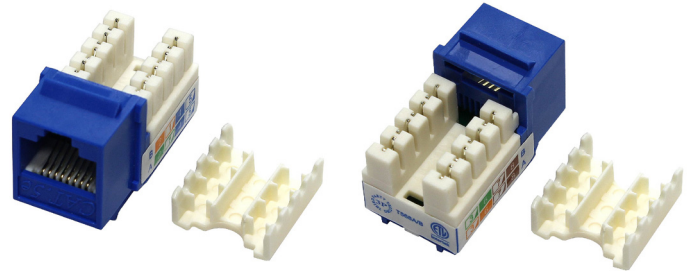





## AVAILABLE COLOURS



**SIZE (WxDxH)** 16.6 x 31.5 x 22.3 mm

## MATERIALS

<b>BODY</b>	Fireproof ABS UL-94V0
<b>JACK</b>	8P8C 50 Micro-inches gold plated
<b>PCB</b>	FR-4 / UL-94V0
<b>IDC CAP</b>	Fireproof ABS UL-94V0
<b>IDC BODY</b>	Fireproof ABS UL-94V0
<b>IDC PIN</b>	Bronze & Tinned
<b>IDC DESCRIPTION</b>	For 22-26 AWG For 110 punch-down Tool



## SPECIFICATIONS

<b>UL APPROVED   3P THIRD PARTY TESTED   ROHS COMPLIANT</b>	<b>INSULATION RESISTANCE</b>	500M ohms (min.)	
<b>MEETS C5E EIA/TIA 568A/B STANDARD   CETLUS CERTIFIED</b>	<b>CONTACT RESISTANCE</b>	20m ohms (max.)	
<b>IDC PUNCH DOWN CYCLE</b>	Over 250 Cycles (min.)	<b>CURRENT RATING</b>	1.5 Amps
<b>JACK INSERTION CYCLE</b>	Over 2000 Cycles (min.)	<b>DC RESISTANCE</b>	0.1 ohms (max.)
<b>OPERATION TEMPERATURE</b>	-40 — +70 Degrees Celsius	<b>WITHSTANDING VOLTAGE</b>	1000 VAC RMS @ 60Hz/1min
<b>TOLERANCE</b>	X ± 1   .X ± 0.2   .XX ± 0.15		

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.