

5U4G

5U4G is a glass envelope octal directly heated full wave rectifier, can be exchangeable with 274B and 5Z3P.

Filament heating

$U_f = 5V$

$I_f = 3A$

Maximum Rating

Peak reverse anode voltage 1550V

Peak anode current 675mA

Recommended working condition



Anode feeding voltage $2 \times 500V$

Resistance each arm 75Ω

Load resistance 2000Ω

Filter capacitance $40\mu F$

Rectified current $\geq 230mA$

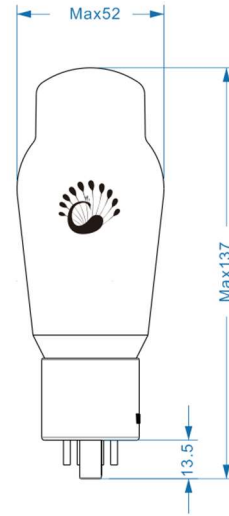

2	Filament (灯丝)
4	Plate (阳极)
6	Plate (阳极)
8	Filament (灯丝)

5U4G

